

Optical signal in a hollow core photonic bandgap fibre is guided in an air core surrounded by a high air filling factor PBG microstructured region (>90%). Added to the low bend sensitivity due to the core high NA, this confers to this fibre design significantly reduced material nonlinearities since more than 95% of optical power is propagating in air. In addition air/undoped silica provides excellent temperature immunity critical for high performance fibre sensing and metrology applications.

MAIN CHARACTERISTICS

- Air core, ultra-low nonlinear coefficient
- Low background losses
- Low dispersion in the centre of the transmission band


APPLICATIONS

- Power delivery
- Fibre sensors
- Nonlinear applications (pulse compression, shaping)

Product line **PERFAS**

FIBRE SPECIFICATIONS	HCF-11-80-750	HCF-12-85-785	HCF-10-100-950	HCF-10-110-1060
Optical parameters				
Center wavelength (nm)	750 +/- 10	785 +/- 10	950 +/- 10	1060 +/- 20
Minimum attenuation (dB/km)	135	125	125	40
Spectral transmission window (nm)	700 - 780	770 - 800	910 - 970	1030 - 1120
Maximum attenuation in transmission window (dB/km)	300	300	200	100
Optical power fraction in core	> 90%	> 90%	> 90%	> 90%
Effective modal index	-0.99	-0.99	-0.99	-0.99
Mode field diameter (µm)	8.5 +/- 1	8.5 +/- 1	8 +/- 1	8.5 +/- 1
Physical/Material parameters				
Fibre material	synthetic silica			
Core concentricity error (µm)	< 0.5			
Core diameter (µm)	11 +/- 1	12 +/- 1	10 +/- 1	10 +/- 1
Cladding diameter (µm)	80 +/- 5	85 +/- 5	100 +/- 5	110 +/- 5
Coating outside diameter (µm)	240 +/- 10			
Coating type	dual coat high index coating			
Proof test level (kpsi)	75			

Typical measured attenuation

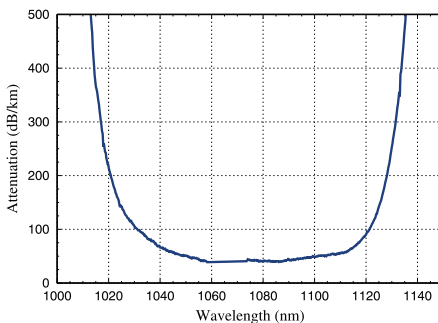

Multiple options and configurations are available. Please contact Photonics Bretagne to find the best fit.

fibre@photonics-bretagne.com | +33 (0)2 96 48 58 89 | www.photonics-bretagne.com